

Power generation efficiency boosted up by clamp-on flowmeters

Energy storage facility uses SITRANS FUS1010 ultrasonic clamp-on flowmeter to maximize efficiency of turbines

When an energy storage facility in New York, USA was looking for a way to improve the efficiency of their power generating turbines they did not have many options to choose from. Because of the sheer size, the space limitations and performance requirements of the application, the only option was to install a SITRANS FUS1010 clamp-on ultrasonic flowmeter from Siemens. Several competitors had tried to accommodate the special application requirements but they had not been able to come up with a viable solution. Once Siemens won the project it took more than a year to complete, the reason being that the meter had to be tailored specifically to the application.

Background

The plant, which is a recharge type system, supplies over a million kilowatts of energy during peak demand periods by cycling water between two reservoirs. One is at the top of a mountain the other is at the base with approximately 1500 ft (467 m) between them; a height difference several times that of Niagara Falls.

During periods of peak demand the water is routed from the upper to the lower reservoir making the turbines produce power through gravitational forces only. When the demand for water is low, the water is pumped back uphill using the turbines and generators as pumps.

In order to improve the performance of the turbine it was necessary to monitor the output efficiency by measuring certain aspects of the application, such as flow and pressure. These values are used to calculate the turbine performance enabling plant operators to monitor the entire process and to detect any trends and track changes over time. To obtain the accurate results needed to provide an exact picture of the turbine's performance, however, highly accurate ($\pm 1\%$) metering devices integrated with the existing installation were needed. And this is where the FUS1010 came in.

The problem

One of the major issues at the energy facility was the installation itself. Because of the way it was

SITRANS F

Answers for industry.

SIEMENS

configured with water flowing to the turbine during the day and water being pumped back up to the reservoir at night, the solution had to take this bi-directional flow into account. In addition, the pipe diameter was so large and the pressures so high that only one flow technology was deemed fit for the job: ultrasonic clamp-on flow measurement. Although an ultrasonic insert type meter was also considered it was ultimately disregarded for two reasons: the fear of post-installation leaks and the need to entirely drain the upper reservoir. Because this had never been done before, it was decided not to pursue this option.

Although the clamp-on flowmeter FUS1010 was considered the most optimum choice for this installation there were still several problems to overcome:

- The penstock was very large with an outer diameter of 113" (2,87 m) and a 1.313" (33,35 mm) steel walled pipe. In addition, it was only partially accessible through a small maintenance vault.
- The distance from where the penstock entered the vault to the transition of the full bore ball valve was only 4 ft (1,22 m).
- The flow velocity was very high at ± 50 ft/s (15,24 m/s) making measurement extremely challenging.
- The flow was bi-directional with the metering location only a few feet downstream of the turbine when it was in pump mode. This resulted in a very poor flow profile and severe flow turbulence making measurements almost impossible to read.


The solution

After more than one year of extensive research, Siemens developed a non-

intrusive solution based on the FUS1010 clamp-on flowmeter that lived up to all of the customer's requirements:

- Specialized shallow path ultrasonic transducers were developed for the FUS1010 that could operate in reflect mode with a minimal linear distance of pipe. Paired with the modified flow computing software the flowmeter was able to read signals that were previously almost impossible to correlate because of the small distance between the transducers resulting in an extremely sharp angle at which the ultrasonic signal hit the pipe walls.
- The position of the gate valve, upstream of the turbine, was transmitted as an analog output to the meter and used to calculate a ball park figure of the flow rate, leaving the meter to compute a higher resolution measurement of the actual flow. This increased the meter's ability to accurately measure the flow with an accuracy of $\pm 1\%$ by improving the correlation of the upstream and downstream ultrasonic signals.
- Magnetic assemblies were configured to mount the transducers tightly to the pipe in the very small space available. The geometry of the vault simply prevented the use of full circumference mounting straps.
- A control routine was implemented to continuously adapt to the changing application based on the operating conditions.

So even though the odds were tough, Siemens designed a solution that overcame all obstacles and achieved or exceeded all of the required performance criteria.

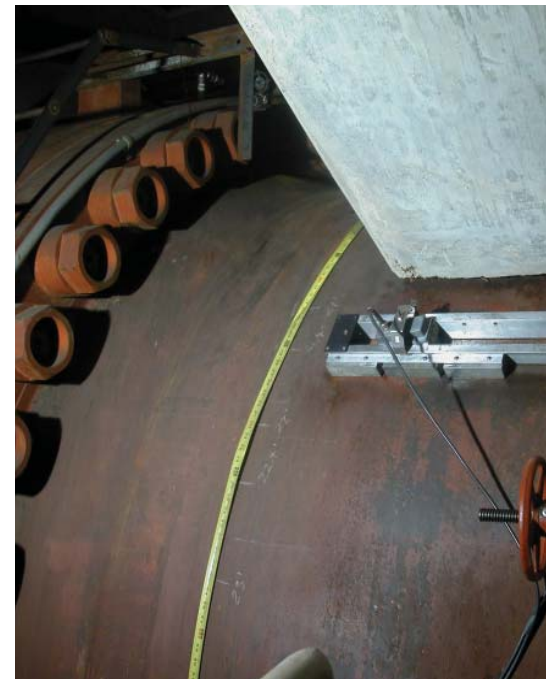

Non-intrusive transducers are mounted on the four foot section of pipe with magnetic assemblies before the transition of the full bore ball valve to the turbine.